

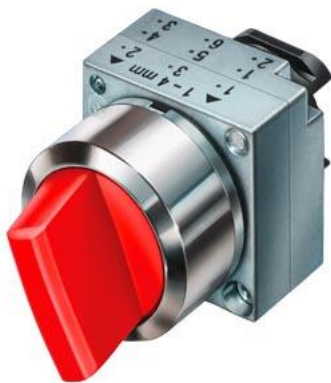


Figure similar

Selector switch, 22 mm, round, Metal, Black, Selector switch, short, heavy duty, 3 switch positions I-O-II, Latching, Actuating angle 2x50 degrees, resistant to solvents With holder !!! Phased-out product !!! Successor is SIRIUS ACT 3SU1 Preferred successor type is >>3SU1052-2BL10-0AA0 + 3SU1550-0AA10-0AA0<<

|                                                    |                                    |
|----------------------------------------------------|------------------------------------|
| product brand name                                 | SIRIUS                             |
| design of the product                              | Single device round                |
| Enclosure                                          |                                    |
| number of command points                           | 1                                  |
| Actuator                                           |                                    |
| design of the actuating element                    | selector switch heavy-duty version |
| principle of operation of the actuating element    | latching                           |
| product extension optional light source            | No                                 |
| color of the actuating element                     | black                              |
| material of the actuating element                  | plastic                            |
| outer diameter of the actuating element            | 28.5 mm                            |
| type of unlocking device                           | rotate-to-unlatch mechanism        |
| number of switching positions                      | 3                                  |
| actuating angle                                    |                                    |
| • clockwise                                        | 50°                                |
| • anticlockwise                                    | 50°                                |
| Front ring                                         |                                    |
| product component front ring                       | Yes                                |
| design of the front ring                           | Standard                           |
| material of the front ring                         | metal                              |
| color of the front ring                            | silver                             |
| Holder                                             |                                    |
| material of the holder                             | Metal                              |
| General technical data                             |                                    |
| product function                                   |                                    |
| • EMERGENCY OFF function                           | No                                 |
| • EMERGENCY STOP function                          | No                                 |
| protection class IP                                | IP67                               |
| vibration resistance according to IEC 60068-2-6    | 20 ... 200 Hz: 5g                  |
| operating frequency maximum                        | 1 000 1/h                          |
| mechanical service life (operating cycles) typical | 300 000                            |
| reference code according to IEC 81346-2            | S                                  |
| Substance Prohibitance (Date)                      | 07/01/2006                         |
| Connections/ Terminals                             |                                    |
| tightening torque of the screws in the bracket     | 1.4 ... 1.6 N·m                    |
| Ambient conditions                                 |                                    |
| ambient temperature                                |                                    |
| • during operation                                 | -25 ... +70 °C                     |
| • during storage                                   | -40 ... +80 °C                     |

|                                                                |                   |
|----------------------------------------------------------------|-------------------|
| environmental category during operation according to IEC 60721 | 3K6               |
| <b>Installation/ mounting/ dimensions</b>                      |                   |
| fastening method                                               | front mounting    |
| shape of the installation opening                              | round             |
| mounting diameter                                              | 22 mm             |
| mounting height                                                | 28 mm             |
| installation width                                             | 28.5 mm           |
| installation depth                                             | 29 mm             |
| <b>Approvals Certificates</b>                                  |                   |
| General Product Approval                                       | Marine / Shipping |



other

[Confirmation](#)

[Miscellaneous](#)

#### Further information

**Siemens has decided to exit the Russian market (see here).**

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

**Siemens is working on the renewal of the current EAC certificates.**

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3500-2SA11>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2SA11>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2SA11>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SB3500-2SA11&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3500-2SA11&lang=en)

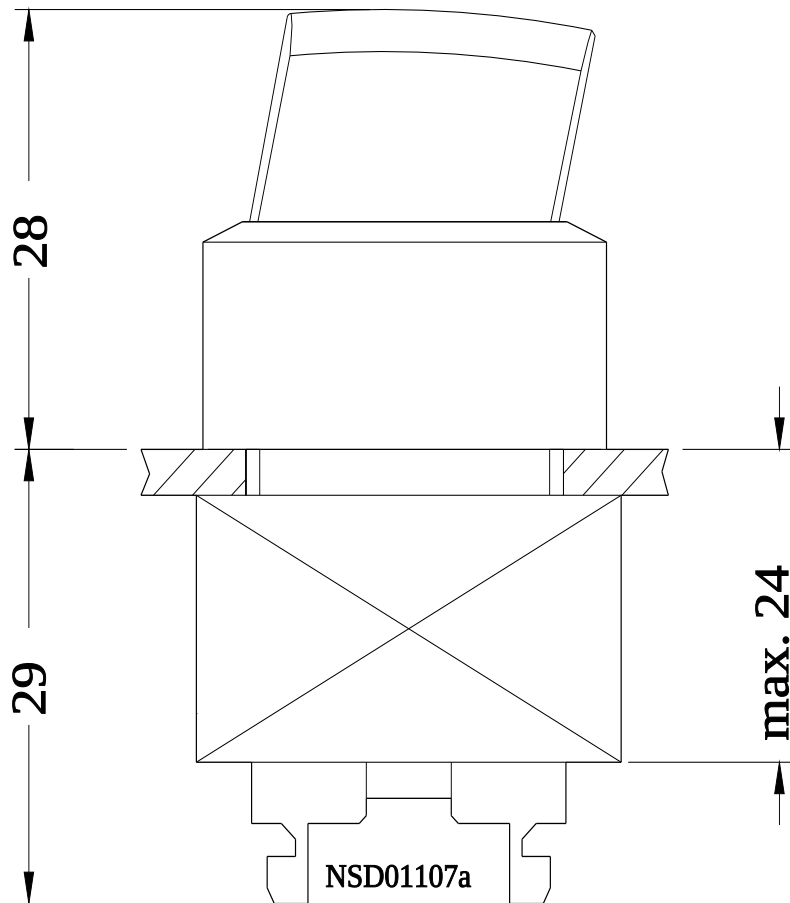

last modified:

11/4/2023 