

RXZE1M4C

socket RXZ -mixed contact - 7 A - 250 V - screw clamp - for relay RXM2.., RXM4..



Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	7 A
[Ue] rated operational voltage	250 V AC conforming to IEC 300 V AC conforming to UL
Connections - terminals	Screw clamp terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) flexible with cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) flexible with cable end Screw clamp terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) solid without cable end Screw clamp terminals, 2 x 0.2...2 x 1.5 mm ² (AWG 24...AWG 16) solid without cable end
Tightening torque	< 0.8 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	29 mm
Product weight	0.053 kg

Environment

Standards	IEC 61984
Ambient air temperature for storage	-55...85 °C
Ambient air temperature for operation	-40...55 °C

IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	0.052 kg
Package 1 Height	29 mm
Package 1 width	31 mm
Package 1 Length	75 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	0.541 kg
Package 2 Height	6.8 cm
Package 2 width	8 cm
Package 2 Length	14.9 cm
Unit Type of Package 3	S03
Number of Units in Package 3	270
Package 3 Weight	14.9 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

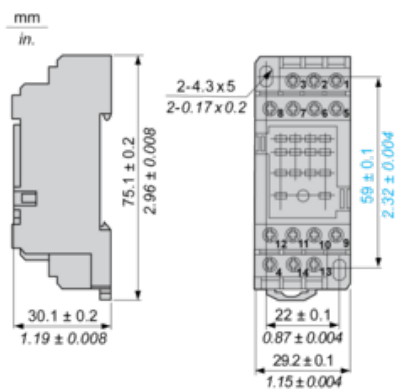

Wiring Diagram

